

DOUBLE WINDOW SIGHT FLOW INDICATOR



NB	Face to Face IN MM	Visible Dia IN MM
15	160	38
20	160	38
25	160	38
40	200	50
50	230	65
65	310	96
80	310	96
100	350	150

PURPOSE

To determine flow, colour and consistency of fluid flowing through a pipe line. Full visibility is obtain through circular/vertical sight glass

SPECIFICATION

Item	: Sight glass
Type	: Double window
Nuts & bolts	: Carbon steel/SS-304/SS-316
Sealing	: CAF/PTFE/METALLIC GRAPHITE/SPIRAL WOUND
Cushion	: CAF/PTFE/METALLIC GRAPHITE/SPIRAL WOUND
Cover Plate	: M.S/ SS-304/SS-316
Body Material	: ASTM A216 Gr. WCB/ASTM 351 CF8/ ASTM351 CF8M/A106 GRB/Carbon steel/SS-304/SS-316
End Connection	: Flanged/ screwed

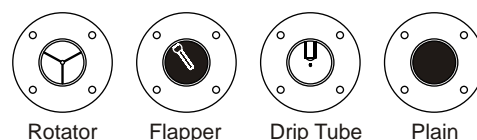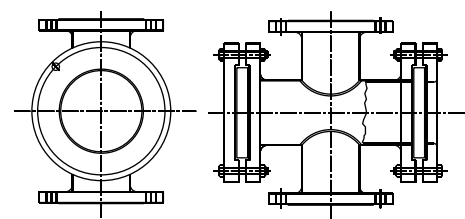

FULL VIEW SIGHT FLOW INDICATOR

SIZE(NB)	F/F Distance IN MM
15	150
20	150
25	150
40	150
50	150
80	150
100	150

SPECIFICATION

Item	: Sight glass
Type	: Full view
Glass	: Borosilicate with flare end
Packing	: PTFE
F/F Distance	: 150 mm
End Connection	: Screwed/ flanged etc.
Tie Rod & Flanges	: SS-316L, SS-316, SS-304L, SS-304,MS,PTFE BUSH & WASHER

FULL VIEW SIGHT GLASS



DETAILS REQUIRED FOR QUOTATION

- 1) Type (full view or double window)
- 2) Size
- 3) End connection detail
- 4) Operating pressure
- 5) Operating temperature
- 6) Material of construction

