
FLOAT & BOARD LEVEL INDICATOR

As the liquid level rises, a large dia float moves up with the change in liquid level in the tank.

The float is attached to a multi strand wire rope, which passes through 2 nos. friction less specially designed pulleys. The Pulleys in turn are connected to a pointer, which moves on a graduated scale by the side of the tank.

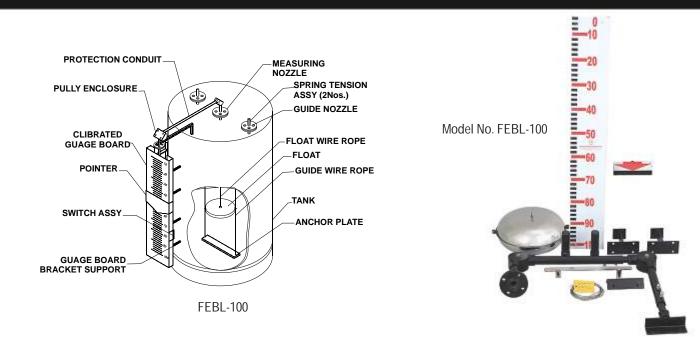


FEATURES

- 1) Clear visibility
- 2) Powder coated screen printed scale board
- 3) Less corissosion powder coated finish
- 4) Easy movement nylon roller pointer glides effortlessly
- 5) No guide wire specially designed self centering float/ Anchor plate optional
- 6) Non- stretching multistrand wire rope in SS/PP
- 7) Dust free housing for pulleys minimizing friction in movement
- 8) Easy to install, modular design,
- 9) Vapour tight-version for evaporating fluids.

DETAILS REQUIRED FOR QUOTATION

- 1) Height of the tank
- 2) Material of construction of wetted parts
- 3) Top nozzle detail
- 4) Service
- 5) Specific gravity
- 6) Operating temperature
- 7) Operating pressure

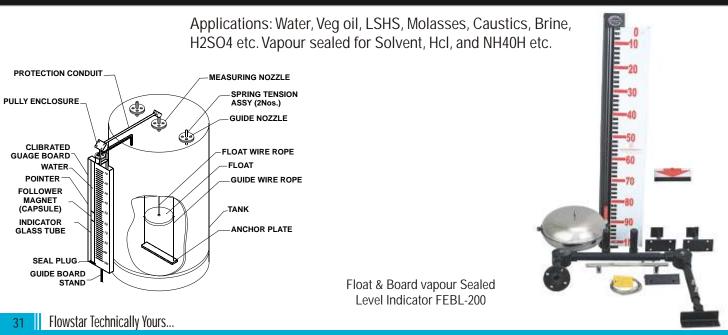



Flowstar Engineering Pvt. Ltd.

An ISO 9001:2008 Certified Company

Tel- 91-0129-4069661, 4069662 E-mail: fsepl@flowstar.co.in Website: www.flowstar.co.in

GENERAL INSTALLATION ARRANGEMENTS

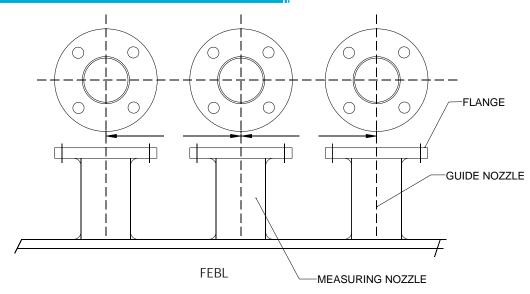

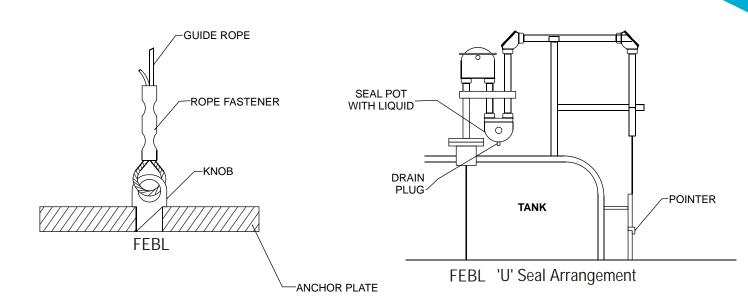

INSPECTION ELBOWS ADJUSTABLE PIPE CUPLING GUAGE BOARD CONNECTION fh SS GUIDE ROPE SCALE MARKING WILL BE AS PER MEASURING RANGE LEVEL INDICATOR SS WIRE CONNECTING TEE CLEATS SUPPLYED BY US 'T' CLEATS TO CONNECT. THE SCALE BOARD WITH PIPE HOLES DRILLED ON BAORD TO SUIT 'T' CLEATS SUPPLIED FOR MOUNDING BOARD É ANCHOR BAR HAS TO BE WELDED TO MATAL TANKS /GROUTED TO RCC TANKS FEBL LENGTH OF PIPE SHOULD BE TANK HIGHT + 600mm AND AROUND 450mm LENGTH SHOULD BE Flowstar Technically Yours... 32

Flowstar Engineering Pvt. Ltd.

An ISO 9001:2008 Certified Company

Tel- 91-0129-4069661, 4069662 E-mail: fsepl@flowstar.co.in Website: www.flowstar.co.in